

PORKKA



Future Plus

TECHNICAL DATA

2011 09

Technical data C 530, M 530, F 530, C 730, M 730, F 730

		C 530	M 530	F 530	C 730	M 730	F 730
Ext. dimension	width	(mm) 600	600	600	850	850	850
	depth	(mm) 750	750	750	750	750	750
	height	(mm) 2100	2100	2100	2100	2100	2100
Int. dimension	width	(mm) 480	480	480	730	730	730
	depth	(mm) 560	560	560	560	560	560
	height	(mm) 1430	1430	1430	1430	1430	1430
Net volume	(l)	291	291	291	471	471	471
Weight	(kg)	120	120	120	140	140	140
Shelves	width	(mm) 400	400	400	650	650	650
	depth	(mm) 530	530	530	530	530	530
Amb. Temperature	(°C)	+5...+43	+5...+43	+5...+43	+5...+43	+5...+43	+5...+43
Operating temperature	(°C)	+1...+12	-5...+12	-26...-15	+1...+12	-5...+12	-26...-15
Connection power	(W)	334	396	560	334	396	560
Cooling effect evaporator/condensor/ambient	(W)	388	650	353	388	650	353
		-10°C/+45°C/+32°C	-10°C/+45°C/+32°C	-30°C/+45°C/+32°C	-10°C/+45°C/+32°C	-10°C/+45°C/+32°C	-30°C/+45°C/+32°C
Refrigerant		R 134A / 250g	R 134A / 240g	R 404A / 250g	R 134a / 375g	R 134A / 240g	R 404A / 350g
Fuse (slow)	(A)	10	10	10	10	10	10
Voltage	(V)	230/50 Hz	230/50 Hz	230/50 Hz	230/50 Hz	230/50 Hz	230/50 Hz
Defrost		1	2	2	1	2	2
	1. Air						
	2. Hotgas						
3. Electric							

Exterior finish Visible exterior surface: stainless sheet steel (AISI 304); alternative exterior surface:white polyester-coated sheet steel; back wall, top and bottom galvanised sheet steel;

Interior finish Stainless sheet steel AISI 304

Insulation 60 mm foamed, CFC and HCFC free polyurethane

Door Equipped with magnetic gasket, lock and spring hinges, door stays open when opening over 90°, reversible

Feet 4 pcs. (1432 5 pcs.) adjustable 150-200 mm tubular stainless steel; alternative 4 pcs. (1432 5 pcs.) castors height 110 mm, with castors external height 2060 mm

Inside 4 pcs (1432 8 pcs) grill shelves, 30 mm difference adjustable pilasters

Refrigeration system Hermetic, air conditioned, with heat exchanger and capillary


Evaporator Fan assisted fin evaporator with automatic defrosting

Standard equipment Electronic controlled digital thermometer/thermostat/defrost timer with acoustic and optical alarm, (adjustable low and high temperature alarm limits) and an option to external alarm (potential free relais contact),TTL -Mod Bus (RS 485) port for the option to connect to PC, readiness for additional probes


Alternatives and accessories, see the price list

Note ! All data are given according to ISO 8561 standard except volumes according to EN441

FUTURE 530

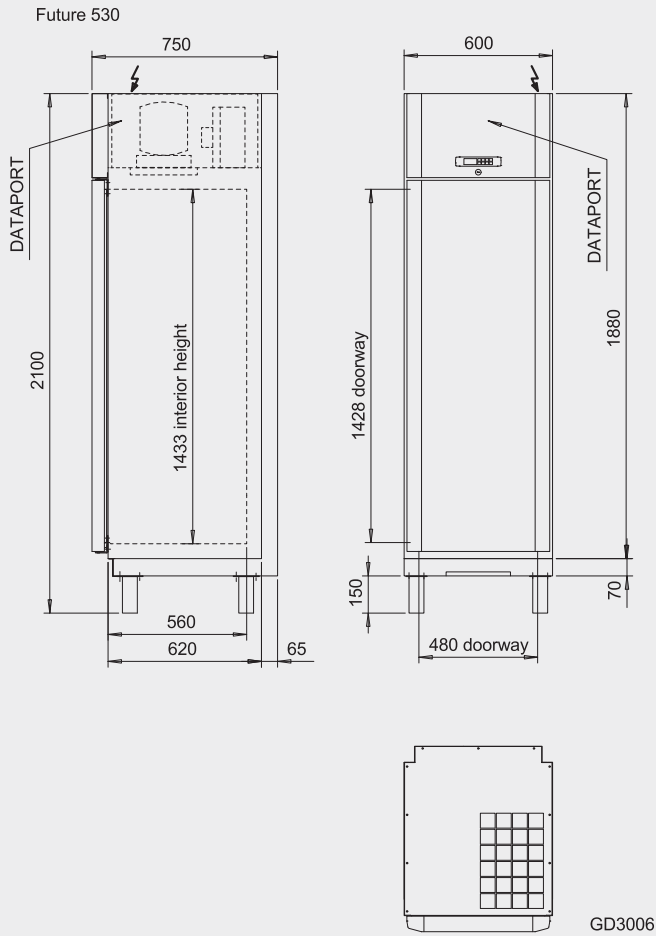

FUTURE 730

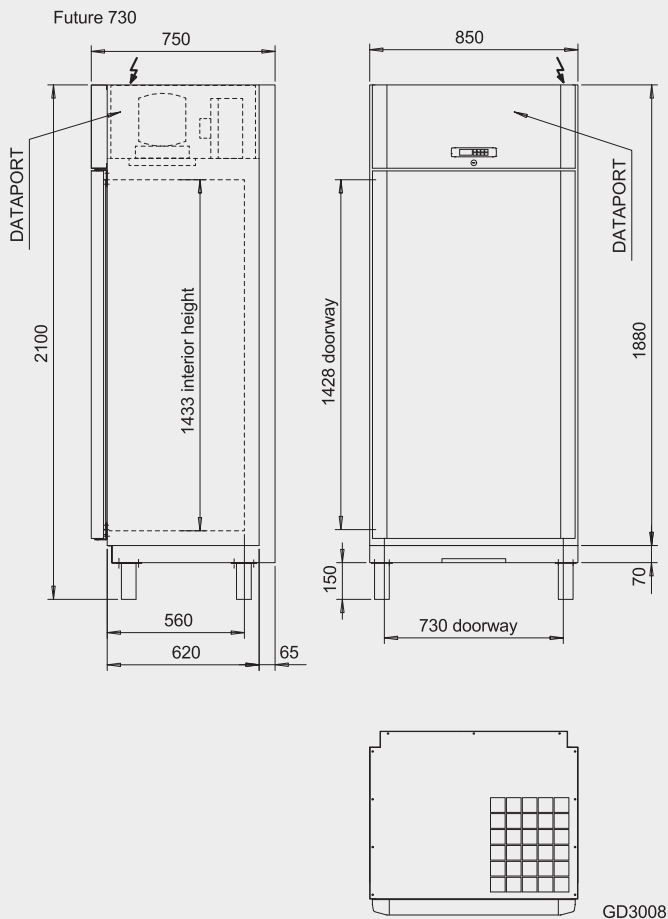

Technical data C 732, M 732, F 732, C 1432, M 1432, F 1432

			C 732	M 732	F 732	C 1432	M 1432	F 1432
Ext. dimension	width	(mm)	730	730	730	1460	1460	1460
	depth	(mm)	850	850	850	850	850	850
	height	(mm)	2100	2100	2100	2100	2100	2100
Int. dimension	width	(mm)	610	610	610	2x610	2x610	2x610
	depth	(mm)	660	660	660	660	660	660
	height	(mm)	1430	1430	1430	1430	1430	1430
Net volume		(l)	453	453	453	906	906	906
Weight		(kg)	150	150	155	230	230	235
Shelves	width	(mm)	530	530	530	530	530	530
	depth	(mm)	650	650	650	650	650	650
Amb. Temperature		(°C)	+5...+43	+5...+43	+5...+43	+5...+32	+5...+32	+5...+32
Operating temperature		(°C)	+1...+12	-5...+12	-26...-15	+1...+12	-5...+12	-26...-15
Connection power		(W)	334	396	560	426	620	950
Cooling effect evaporator/condensor/ambient		(W)	388	650	353	650	775	617
			-10°C/+45°C/+32°C	-10°C/+45°C/+32°C	-30°C/+45°C/+32°C	-10°C/+45°C/+32°C	-10°C/+45°C/+32°C	-30°C/+45°C/+32°C
Refrigerant			R 134a / 375g	R 134A / 240g	R 404A / 350g	R 134a / 375g	R 404A / 375g	R 404A / 370g
Fuse (slow)		(A)	10	10	10	10	10	10
Voltage		(V)	230/50 Hz	230/50 Hz	230/50 Hz	230/50 Hz	230/50 Hz	230/50 Hz
Defrost			1	2	2	1	2	2
1. Air								
2. Hotgas								
3. Electric								

Exterior finish Visible exterior surface: stainless sheet steel (AISI 304); alternative exterior surface:white polyester-coated sheet steel; back wall, top and bottom galvanised sheet steel;

Interior finish Stainless sheet steel AISI 304

Insulation 60 mm foamed, CFC and HCFC free polyurethane

Door Equipped with magnetic gasket, lock and spring hinges, door stays open when opening over 90°, reversible

Feet 4 pcs. (1432 5 pcs.) adjustable 150-200 mm tubular stainless steel; alternative 4 pcs. (1432 5 pcs.) castors height 110 mm, with castors external height 2060 mm

Inside 4 pcs (1432 8 pcs) grill shelves, 30 mm difference adjustable pilasters

Refrigeration system Hermetic, air conditioned, with heat exchanger and capillary


Evaporator Fan assisted fin evaporator with automatic defrosting

Standard equipment Electronic controlled digital thermometer/thermostat/defrost timer with acoustic and optical alarm, (adjustable low and high temperature alarm limits) and an option to external alarm (potential free relais contact),TTL -Mod Bus (RS 485) port for the option to connect to PC, readiness for additional probes


Alternatives and accessories, see the price list

Note ! All data are given according to ISO 8561 standard except volumes according to EN441

FUTURE 732

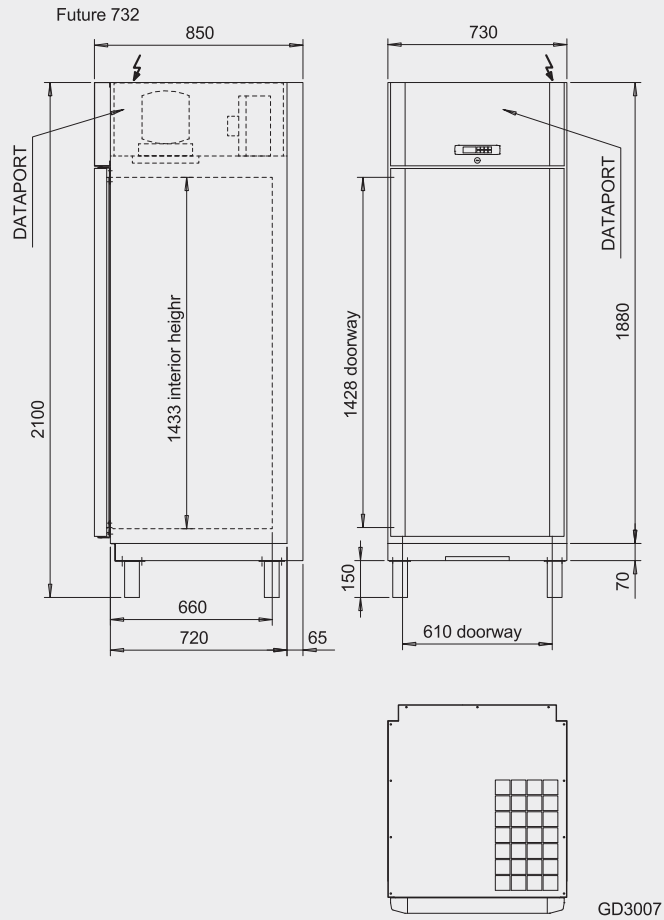

FUTURE 1432

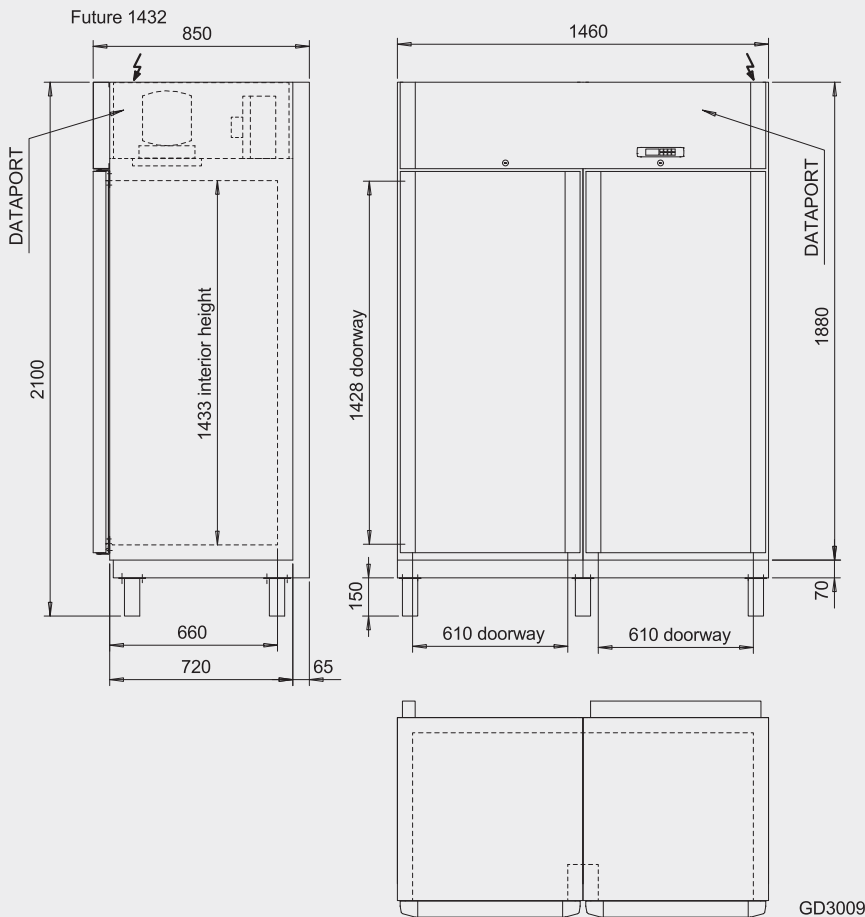

AIR IN - FILTER



AIR OUT




Technical data GLASS DOOR C 732 GD, F 732 GD, C 1432 GD, F 1432 GD


			C 732 GD	F 732 GD	C 1432 GD	F 1432 GD
Ext. dimension	width	(mm)	730	730	1460	1460
	depth	(mm)	850	850	850	850
	height	(mm)	2100	2100	2100	2100
Int. dimension	width	(mm)	610	610	2x610	2x610
	depth	(mm)	660	660	660	660
	height	(mm)	1430	1430	1430	1430
Net volume		(l)	453	453	906	906
Weight		(kg)	150	155	245	245
Shelves	width	(mm)	530	530	530	530
	depth	(mm)	650	650	650	650
Amb. Temperature		(°C)	+5...+43	+5...+43	+5...+32	+5...+32
Operating temperature		(°C)	+1...+12	-26...-15	+1...+12	-26...-15
Connection power		(W)	370	620	692	1540
Cooling effect evaporator/condensor/ambient		(W)	388	353	775	2*452
			-10°C/+45°C/+32°C	-30°C/+45°C/+32°C	-10°C/+45°C/+32°C	-30°C/+45°C/+32°C
Refrigerant			R 134a / 375g	R 404A / 350g	R 404A / 375g	R 404A / 2*350g
Fuse (slow)		(A)	10	10	10	10
Voltage		(V)	230/50 Hz	230/50 Hz	230/50 Hz	230/50 Hz
Defrost 1. Air 2. Hotgas 3. Electric			1	2	1	2

Exterior finish	Visible exterior surface: stainless sheet steel (AISI 304); alternative exterior surface:white polyester-coated sheet steel; back wall, top and bottom galvanised sheet steel;
Interior finish	Stainless sheet steel AISI 304
Insulation	60 mm foamed, CFC and HCFC free polyurethane
Door	Equipped with magnetic gasket, lock and spring hinges, door stays open when opening over 90°, reversible
Feet	4 pcs. (1432 5 pcs.) adjustable 150-200 mm tubular stainless steel; alternative 4 pcs. (1432 5 pcs.) castors height 110 mm, with castors external height 2060 mm
Inside	4 pcs (1432 8 pcs) grill shelves, 30 mm difference adjustable pilasters
Refrigeration system	Hermetic, air conditioned, with heat exchanger and capillary
Evaporator	Fan assisted fin evaporator with automatic defrosting
Standard equipment	Electronic controlled digital thermometer/thermostat/defrost timer with acoustic and optical alarm, (adjustable low and high temperature alarm limits) and an option to external alarm (potential free relais contact),TTL -Mod Bus (RS 485) port for the option to connect to PC, readiness for additional probes
	Alternatives and accessories, see the price list
Note !	All data are given according to ISO 8561 standard except volumes according to EN441

FUTURE 732 GD

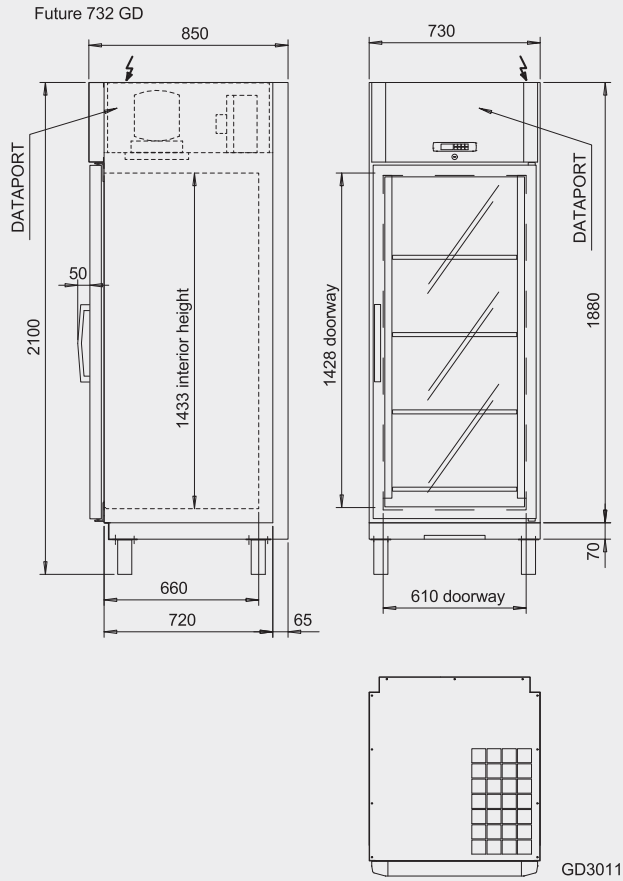

FUTURE 1432 GD

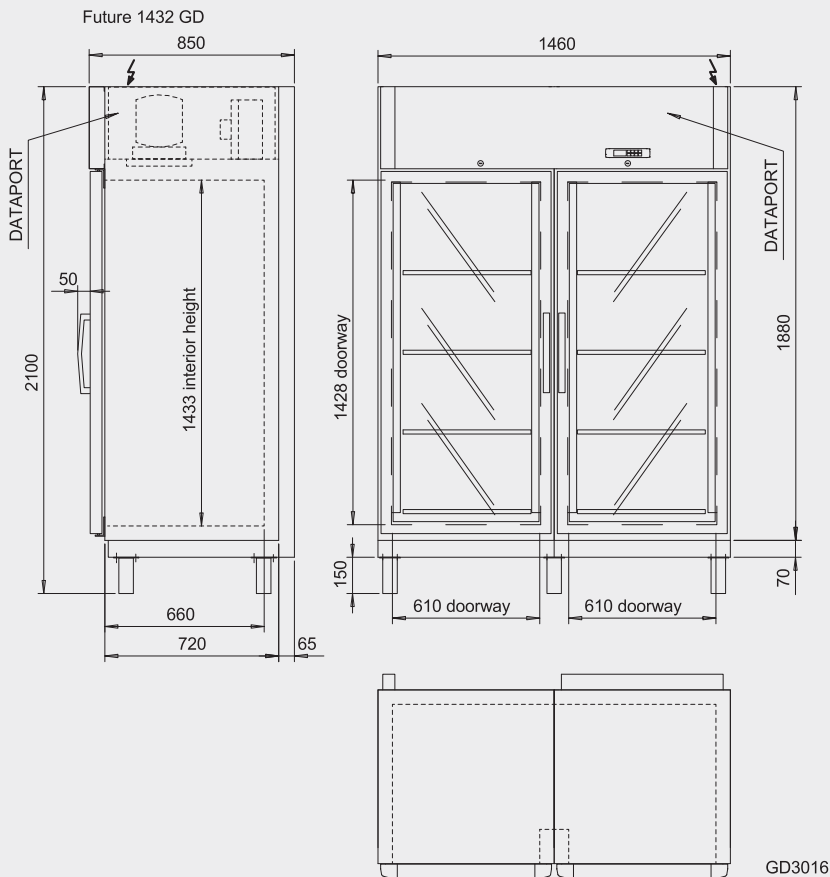

PORKKA

Porkka Finland Oy is an internationally recognised designer and manufacturer of refrigeration equipment. Major clients include commercial kitchens, restaurants, fast food outlets, hotels, industrial canteens, hospitals, laboratories and retailers throughout Europe.

Our main markets outside of Finland include Scandinavia, United Kingdom, Germany, Switzerland, Holland, Belgium, Russia and the Baltic regions. 80% of the companies' turnover is derived from foreign transactions and exports. Ongoing and adaptive development by numerous foreign subsidiaries and representatives ensures our continued success.

Porkka's continued success is based on decades of experience, customer focused design and continuous product development. New innovative products are launched each year.

Porkka Finland Oy is part of the Huurre Group. Porkka and Huurre brands are well known for their quality and reliability.

Porkka Finland Oy
Soisalmentie 3
FI-15860 Hollola, Finland
Tel. +358 20 5555 12
Fax. +358 20 5555 497
e-mail: porkka@huurre.com
www.porkka.fi

Contains fluorinated greenhouse gases covered by the Kyoto Protocol. Refrigerant and charge size can be found on the name plate. Hermetically sealed equipment.

R404A GWP=3800
R134a GWP=1300
R290 GWP=3



All rights reserved
© Porkka Finland Oy