

PORKKA

FUTURE PLUS MEDI LINE MC, MF





Technical data
2010-11

Technical data MC 530, MF 530, MC 730, MF 730, MC 732, MF 732



			MC 530	MF 530	MC 730	MF 730	MC 732	MF 732
Ext. dimension	width	(mm)	600	600	850	850	730	730
	depth	(mm)	750	750	750	750	850	850
	height	(mm)	2100	2100	2100	2100	2100	2100
Int. dimension	width	(mm)	480	480	730	730	610	610
	depth	(mm)	560	560	560	560	660	660
	height	(mm)	1430	1430	1430	1430	1430	1430
Net volume		(l)	287	287	464	464	447	447
Weight		(kg)	120	120	140	140	150	155
Shelves	width	(mm)	400	400	650	650	530	530
	depth	(mm)	530	530	530	530	650	650
Amb. Temperature		(°C)	+5...+43	+5...+43	+5...+43	+5...+43	+5...+43	+5...+43
Operating temperature		(°C)	+1...+12	-26...-15	+1...+12	-26...-15	+1...+12	-26...-15
Connection power		(W)	334	560	334	560	334	560
Cooling effect evaporator/condensor/ ambient		(W)	388	353	388	353	388	353
			-10°C/+45°C/ +32°C	-30°C/+45°C/ +32°C	-10°C/+45°C/ +32°C	-30°C/+45°C/ +32°C	-10°C/+45°C/ +32°C	-30°C/+45°C/ +32°C
Refrigerant			R 134A / 250g	R 404A / 250g	R 134a / 375g	R 404A / 350g	R 134a / 375g	R 404A / 350g
Fuse (slow)		(A)	10	10	10	10	10	10
Voltage		(V)	230/50 Hz	230/50 Hz	230/50 Hz	230/50 Hz	230/50 Hz	230/50 Hz
Defrost			1	2	1	2	1	2
1. Air								
2. Hotgas								
3. Electric								
Exterior finish	Visible exterior surface: white polyester-coated sheet steel; back wall, top and bottom galvanised sheet steel; alternative exterior surface: stainless sheet steel (AISI 304)							
Interior finish	Stainless sheet steel AISI 304							
Insulation	60 mm foamed, CFC and HCFC free polyurethane							
Door	Equipped with magnetic gasket, lock and spring hinges, door stays open when opening over 90°, reversible							
Feet	4 pcs. adjustable 150-200 mm tubular stainless steel; alternative 4 pcs. castors height 110 mm, with castors external height 2060 mm							
Inside	4 pcs stainless steel plate shelves, alternative grill shelves, 30 mm difference adjustable pilasters							
Refrigeration system	Hermetic, air conditioned, with heat exchanger and capillary							
Evaporator	Fan assisted fin evaporator with automatic defrosting							
Standard equipment	Electronic controlled digital thermometer/thermostat/defrost timer with acoustic and optical alarm, (adjustable low and high temperature alarm limits) and an option to external alarm (potential free relais contact),TTL -Mod Bus (RS 485) port for the option to connect to PC, readiness for additional probes							
	Alternatives and accessories, see the price list							
Note !	All data are given according to ISO 8561 standard except volumes according to EN441							

Dimension drawings MC 530, MF 530, MC 730, MF 730, MC 732, MF 732



FUTURE 530

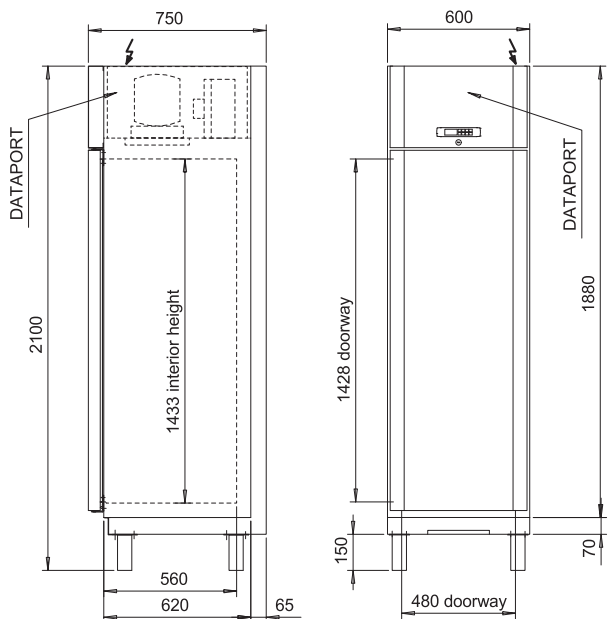

FUTURE 730

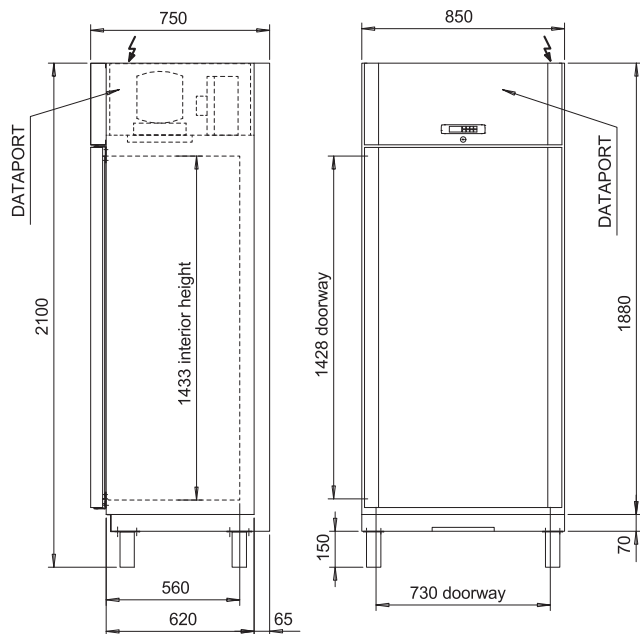


FUTURE 732

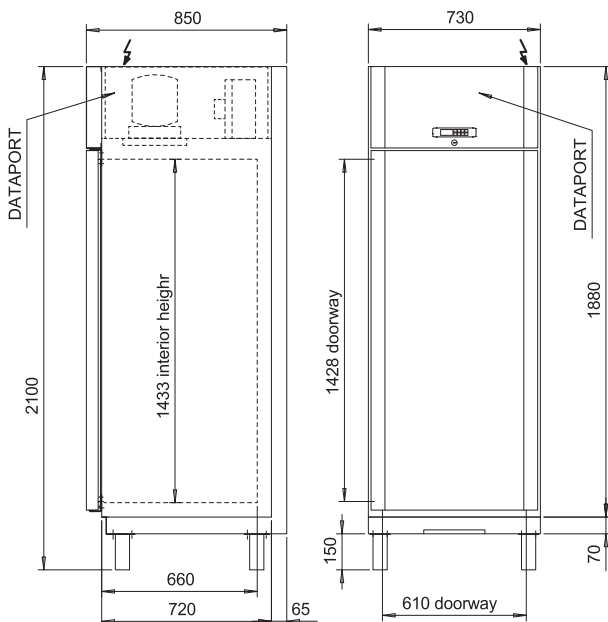

Technical data MC 732 GD, MF 732 GD

		MC 732 GD	MF 732 GD
Ext. dimension	width (mm)	730	730
	depth (mm)	850	850
	height (mm)	2100	2100
Int. dimension	width (mm)	610	610
	depth (mm)	660	660
	height (mm)	1430	1430
Net volume	(l)	447	447
Weight	(kg)	150	155
Shelves	width (mm)	530	530
	depth (mm)	650	650
Amb. Temperature	(°C)	+5...+43	+5...+43
Operating temperature	(°C)	+1...+12	-26...-15
Connection power	(W)	370	620
Cooling effect evaporator/condensor/ambient	(W)	388	353
		-10°C/+45°C/+32°C	-30°C/+45°C/+32°C
Refrigerant		R 134a / 375g	R 404A / 350g
Fuse (slow)	(A)	10	10
Voltage	(V)	230/50 Hz	230/50 Hz
Defrost		1	2
1. Air			
2. Hotgas			
3. Electric			
Exterior finish	Visible exterior surface: white polyester-coated sheet steel; back wall, top and bottom galvanised sheet steel; alternative exterior surface: stainless sheet steel (AISI 304)		
Interior finish	Stainless sheet steel AISI 304		
Insulation	60 mm foamed, CFC and HCFC free polyurethane		
Door	Equipped with magnetic gasket, lock and spring hinges, door stays open when opening over 90°, reversible		
Feet	4 pcs. adjustable 150-200 mm tubular stainless steel; alternative 4 pcs. castors height 110 mm, with castors external height 2060 mm		
Inside	4 pcs stainless steel plate shelves, alternative grill shelves, 30 mm difference adjustable pilasters		
Refrigeration system	Hermetic, air conditioned, with heat exchanger and capillary		
Evaporator	Fan assisted fin evaporator with automatic defrosting		
Standard equipment	Electronic controlled digital thermometer/thermostat/defrost timer with acoustic and optical alarm, (adjustable low and high temperature alarm limits) and an option to external alarm (potential free relais contact),TTL -Mod Bus (RS 485) port for the option to connect to PC, readiness for additional probes		
	Alternatives and accessories, see the price list		
Note !	All data are given according to ISO 8561 standard except volumes according to EN441		

Dimension drawings MC 732 GD, MF 732 GD

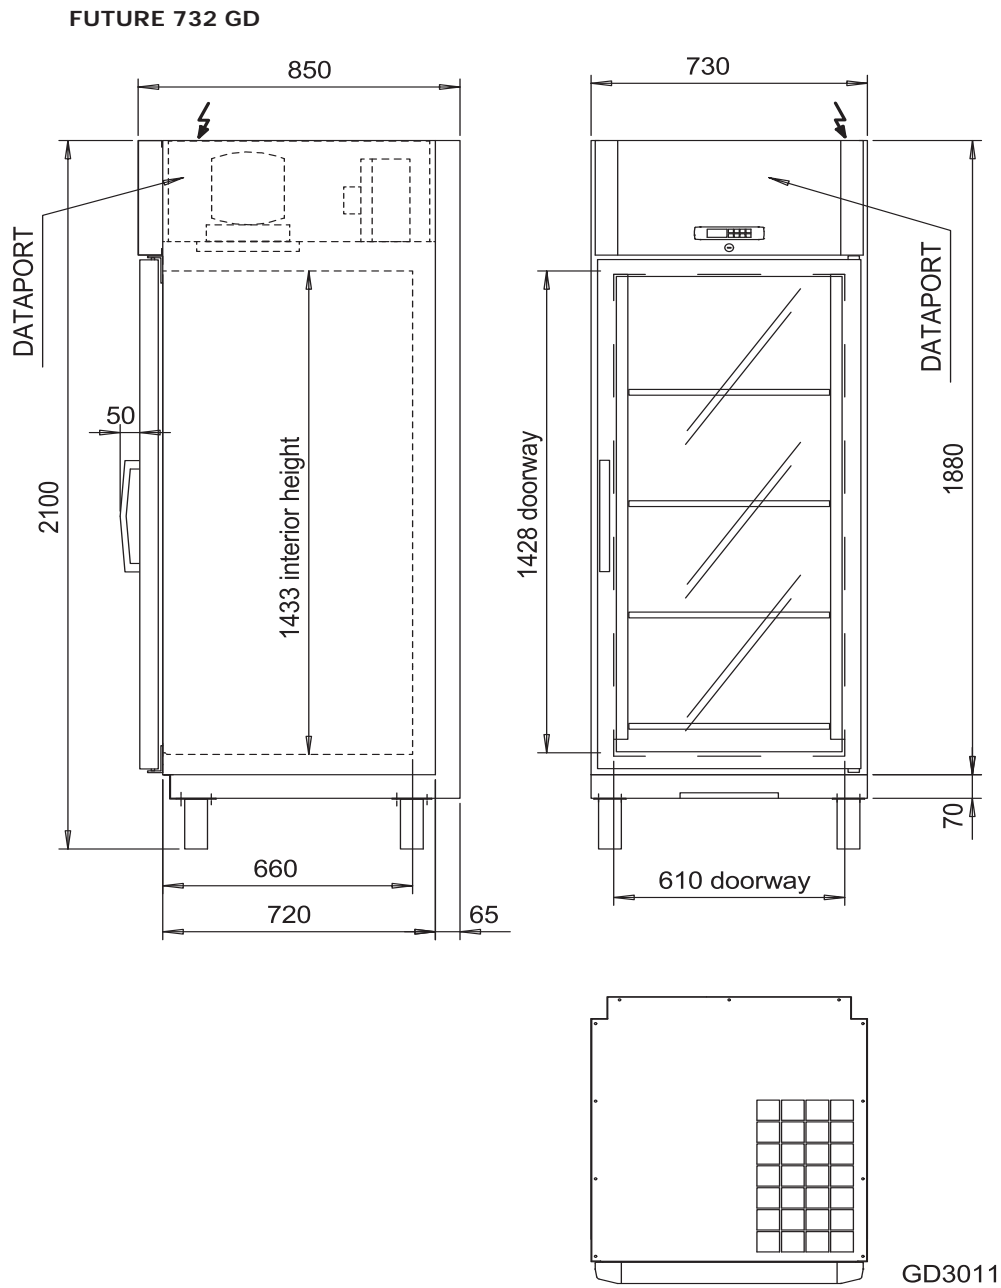

PORKKA

Porkka Finland Oy is an internationally recognised designer and manufacturer of refrigeration equipment. Major clients include commercial kitchens, restaurants, fast food outlets, hotels, industrial canteens, hospitals, laboratories and retailers throughout Europe.

Our main markets outside of Finland include Scandinavia, United Kingdom, Germany, Switzerland, Holland, Belgium, Russia and the Baltic regions. 80% of the companies' turnover is derived from foreign transactions and exports. Ongoing and adaptive development by numerous foreign subsidiaries and representatives ensures our continued success.

Porkka's continued success is based on decades of experience, customer focused design and continuous product development. New innovative products are launched each year.

Porkka Finland Oy is part of the Huurre Group. Porkka and Huurre brands are well known for their quality and reliability.

Porkka Finland Oy
Soisalmentie 3
FI-15860 Hollola, Finland
Tel. +358 20 5555 12
Fax. +358 20 5555 497
e-mail: porkka@huurre.com
www.porkka.fi

Contains fluorinated greenhouse gases covered by the Kyoto Protocol. Refrigerant and charge size can be found on the name plate. Hermetically sealed equipment.

R404A GWP=3800
R134a GWP=1300



All rights reserved
© Porkka Finland Oy